

8 ZONE LEAK DETECTION ALARM.

The Leak Detection Panel (LDP) has a leak-detected, a sensor healthy, and a sensor fault LED per zone.


In the event of a leak, the alarm LED will flash red, the buzzer will sound, the valve will operate (if connected) & the relays will energize. Pressing the mute button will silence the buzzer. The Leak LED will remain illuminated until the sensor has been dried.

In the event of a sensor fault, the sensor fault LED will change from green to red, buzzer will sound and the fault relay energize.

The mute button can be pressed to silence the buzzer.
The fault LED will remain red until the sensor fault has been repaired.

The panel will self-reset in both instances unless the alarm reset link is set to latch.


The LDP test button can be pressed to test the functionality of all LED's.

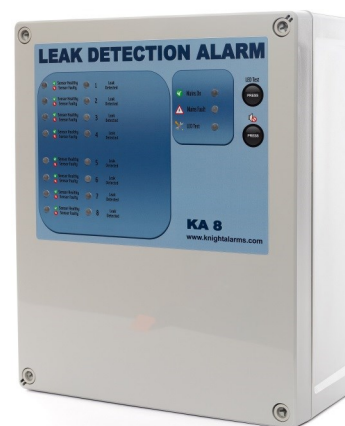

Model Number KA8

Technical Specifications	Model KA8	Compatible Sensors
Dimensions	H289mm x W239mm x D107mm	
Weight	589g	Cable Sensor
Material and IP rating	ABS, UL94-HB ingress IP54	
Operating Temperature	Resistant up to 55°C down to -25°C	Probe Sensor
Common alarm relay x2	230V change-over volt-free Max 2A	
Input Main Voltage	110-240 VAC @50Hz	Mini Probe
Mains Fuse PCB Mounted	2A quick blow 20mm glass	
Battery Fuse PCB Mounted	1A quick blow 20mm glass	Mini Pad Sensor
Battery Backup	1 x 12V 01.2Ah sealed lead acid	
Battery Fuse PCB Mounted	1A quick blow 20mm glass	Overflow Sensor
Common Fault Relay Output x1	50V change-over volt-free Max 1A	
Sensor Outputs	5V DC 2 mA SELV	Over-Temperature
Sounder Output	3400Hz 95 dB @ 10cm	
Mains fail relay x1	230V change-over volt-free Max 2A	
Mains Fuse PCB Mounted	2A quick blow 20mm glass	
Zone 1 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 2 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 3 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 4 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 5 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 6 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 7 Relay Contact Output x2	230V change-over volt-free Max 2A	
Zone 8 Relay Contact Output x2	230V change-over volt-free Max 2A	

8 ZONE LEAK DETECTION ALARM.

Technical Specifications	8 zone model KA8	Compatible Sensors
LED Test Button.	Tests full operation of all LED's.	
Mute Button.	1 Silences the internal sounder.	Repeater Alarm
Mains Healthy LED.	Indicates when the system has a healthy power supply connected.	
Leak Detected LED.	Will flash red when the connected sensors detect an incident.	Oil Sensor Probe
Sensor Fault LED.	Will indicate green when healthy and red when a fault has occurred.	
Alarm Reset Link.	Sets alarm to latch on or Auto reset.	Zone 1
Sensitivity adjustment per zone.	Single turn potentiometer left decrease right increase.	Zone 2
System software version	Knight Alarms V2.1 4Mhz watchdog enabled.	
Battery Backup	Connected to maintain system functionality in the event of power loss. Float charged.	Over-Temperature
Power Supply.	110—230V AC switch mode 12V DC	
Terminal ratings.	5mm 230V AC MAX 8amps	Humidity Sensor
Valve Exercise Mode	Fully Automatic valve exercise cycle	
Beacon Output	configured to output 5V DC when in alarm or fault condition.	Metal Water Probe
MAX Sensor Cable Length	100M of Sensor cable and 100M Connection cable.	
Optimised Self Learning	Minimises spurious alarms	Braided Sensor Tape

